

RenoMatic price list

Valid from 01.06.2024



Campaign products

Sectional garage doors RenoMatic and side doors NT 60

HÖRMANN



WE THINK AND ACT GREEN. As a family business, we are very conscious of our responsibility to future generations and offer all products for residential construction CO₂-neutral as standard. The Hörmann sustainability strategy aims to reduce and avoid emissions. We cover 100% of our electrical power needs at all European production locations with genuine green electricity from renewable sources. We also apply many other measures to reduce our consumption and save more than 75000 tonnes of CO₂ each year. We work with ClimatePartner to offset the remaining emissions by supporting certified climate protection projects.



You can find further information at www.hoermann.com/sustainability



ClimatePartner
certified product
climate-id.com/XNEBKC



CO₂
measure
reduce
contribute

Contents

Campaign products

Sectional garage doors RenoMatic	Page
RenoMatic M-ribbed – Woodgrain standard sizes	4
RenoMatic L-ribbed – Slategrain – standard sizes	5
RenoMatic L-ribbed – Planar – standard sizes	6
RenoMatic side doors NT 60 M-ribbed – Woodgrain, L-ribbed – Slategrain and L-ribbed – Planar	7
Optional extras for RenoMatic	8

Sectional garage doors

RenoMatic


M-ribbed – Woodgrain – standard sizes

Standard sizes


Sectional doors RenoMatic with M-ribbed Woodgrain in 7 colours



RAL 9016,
Traffic white



RAL 9005
Jet black




RAL 9006,
White aluminium




RAL 9007,
Grey aluminium



RAL 7016,
Anthracite grey



RAL 8028,
Terra brown



CH 703,
Anthracite metallic

- **Sectional garage door RenoMatic**, M-ribbed, Woodgrain surface finish with embossing in saw cut texture
- **Double-skinned, insulated 42 mm thick sections** for high thermal insulation, good stability and smooth running
- On the exterior with Woodgrain surface finish in Traffic white and 6 additional colours, door interior as well as the end caps are silver-coloured, galvanized
- **Optimum long-term protection of the frame** with a plastic frame shoe
- Reliable protection against forced opening with mechanical anti-lift kit
- **Garage door operator ProMatic series 4 incl. 2 hand transmitters with BiSecur radio technology** and additional opening height to ventilate the garage
For door leaf surfaces up to max. 11.25 m²

Please note: Prices shown are a complete price of the door, frame pack, boom and ProMatic operator.

Grid height	2250	1785	1785	1785	1785	1990	2096	2270	2419	2707	2567	2694	3013 *
	2125	1704	1704	1704	1704	1928	2035	2204	2352	2679	2537	2656	2936 *
	2000	1703	1703	1703	1703	1888	2034	2145	2304	2642	2488	2600	2954 *
	2134	2286	2375	2500	2750	3000	3500	4000	4267	4500	5000	5500	
	Grid width												

* SupraMatic E required. Included in price.

Doors with tension spring assembly (track application Z)

Doors with torsion spring assembly (track application N)


Sectional garage doors

RenoMatic

L-ribbed – Slategrain – standard sizes

Standard sizes

Sectional doors RenoMatic with L-ribbed Slategrain in 7 colours



RAL 9016
Traffic white



RAL 9005
Jet black




RAL 9006
White aluminium



RAL 9007
Grey aluminium



RAL 7016
Anthracite grey



RAL 8028
Terra brown




CH 703
Anthracite
metallic


- **Sectional garage door RenoMatic**, L-ribbed, Slategrain surface finish with embossing in slate structure
- **Double-skinned, insulated 42 mm thick sections** for high thermal insulation, good stability and smooth running
- On the exterior with Slategrain surface finish in Traffic white and 6 additional colours, door interior as well as the end caps are silver-coloured, galvanized
- **Optimum long-term protection of the frame** with a plastic frame shoe
- Reliable protection against forced opening with mechanical anti-lift kit
- **Garage door operator ProMatic series 4 incl. 2 hand transmitters with BiSecur radio technology** and additional opening height to ventilate the garage
For door leaf surfaces up to max. 11.25 m²

Please note: Prices shown are a complete price of the door, frame pack, boom and ProMatic operator.

Grid height	2250	1853	1853	1853	1853	2045	2143	2306	2445	2711	2581	2699	3005 *
	2125	1774	1774	1774	1774	1984	2084	2241	2380	2684	2552	2663	2932 *
	2000	1772	1772	1772	1772	1946	2082	2185	2333	2649	2505	2610	2949 *
		2134	2286	2375	2500	2750	3000	3500	4000	4267	4500	5000	5500
		Grid width											

* SupraMatic E required. Included in price.

 Doors with tension spring assembly (track application Z)

 Doors with torsion spring assembly (track application N)


Sectional garage doors

RenoMatic

L-ribbed – Planar – standard sizes

Standard sizes

Sectional doors RenoMatic with L-ribbed Planar in 7 colours Matt deluxe



CH 9016 Matt deluxe
Traffic white




CH 905 Matt deluxe
Black




CH 9006 Matt deluxe
White aluminium




CH 9007 Matt deluxe
Grey aluminium



CH 7016 Matt deluxe
Anthracite grey



CH 8028 Matt deluxe
Terra brown



CH 703 Matt deluxe
Anthracite metallic

- **Sectional garage door RenoMatic**, L-ribbed, smooth surface finish
 - **Double-skinned, insulated 42 mm thick sections** for high thermal insulation, good stability and smooth running
 - On the exterior with Planar surface finish in Traffic white Matt deluxe and 6 additional Matt deluxe colours, door interior as well as the end caps are silver-coloured, galvanized
 - **Optimum long-term protection of the frame** with a plastic frame shoe
 - Reliable protection against forced opening with mechanical anti-lift kit
 - **Garage door operator ProMatic series 4 incl. 2 hand transmitters with BiSecur radio technology** and additional opening height to ventilate the garage
- For door leaf surfaces up to max. 11.25 m²

Please note: Prices shown are a complete price of the door, frame pack, boom and ProMatic operator.

Grid height	2250	1976	1976	1976	1976	2113	2232	2427	2596	3111	2923	3098	3317 *
	2125	1897	1897	1895	1895	2051	2174	2362	2528	3083	2886	3056	3262 *
	2000	1895	1895	1893	1893	2030	2172	2326	2474	3042	2818	2992	3278 *
		2134	2286	2375	2500	2750	3000	3500	4000	4267	4500	5000	5500
		Grid width											

* SupraMatic E required. Included in price.

■ Doors with tension spring assembly (track application Z)

■ Doors with torsion spring assembly (track application N)

Sectional garage doors

RenoMatic

Side doors NT 60

Side doors NT 60 for sectional garage door RenoMatic

Side doors NT 60 for sectional garage door RenoMatic, M-ribbed – Woodgrain

- Side doors NT 60 profile type 1 with block frame for fitting behind the opening, opening inwards
- Door infill double-skinned, insulated 42 mm thick sections, M-ribbed for high thermal insulation
- Exterior of the door infill with Woodgrain surface finish in Traffic white and 6 additional colours, interior of the door leaf infill silver-coloured, galvanized
- Lever handle set with oval rose escutcheons, prepared for profile cylinder, black plastic



RAL 9016
Traffic white




RAL 9005
Jet black



RAL 9006
White aluminium




RAL 9007
Grey aluminium



RAL 7016
Anthracite grey



RAL 8028
Terra brown



CH 703
Anthracite metallic

Ordering size

Overall frame dimension (RAM)

From 855	×	1800
Up to 1200	×	2100
Up to 1330	×	2558

Surface finish Woodgrain

In 7 colours

1124

1166

Side doors NT 60 for sectional garage door RenoMatic, L-ribbed – Slategrain

- Side doors NT 60 profile type 1 with block frame for fitting behind the opening, opening inwards
- Door infill double-skinned, insulated 42 mm thick sections, L-ribbed for high thermal insulation
- Exterior of the door infill with Slategrain surface finish in Traffic white and 6 additional colours, interior of the door leaf infill silver-coloured, galvanized
- Lever handle set with oval rose escutcheons, prepared for profile cylinder, black plastic
- Leaf frame and door frame coated in a matching colour



RAL 9016
Traffic white



RAL 9005
Jet black



RAL 9006
White aluminium



RAL 9007
Grey aluminium



RAL 7016
Anthracite grey



RAL 8028
Terra brown



CH 703
Anthracite metallic

Ordering size

Overall frame dimension (RAM)

From 855	×	1800
Up to 1200	×	2100
Up to 1330	×	2558

Slategrain surface finish

In 7 colours

1249

1294

Side doors NT 60 for sectional garage door RenoMatic, L-ribbed – Planar

- Side doors NT 60 profile type 1 with block frame for fitting behind the opening, opening inwards
- Door infill double-skinned, insulated 42 mm thick sections, L-ribbed for high thermal insulation
- Exterior of the door infill with Planar surface finish in Traffic white and 6 additional colours, interior of the door leaf infill silver-coloured, galvanized
- Lever handle set with oval rose escutcheons, prepared for profile cylinder, black plastic



CH 9016 Matt deluxe,
Traffic white



CH 905 Matt deluxe
black



CH 9006 Matt deluxe,
White aluminium



CH 9007 Matt deluxe,
Grey aluminium



CH 7016 Matt deluxe,
Anthracite grey



CH 8028 Matt deluxe,
Terra brown



CH 703 Matt deluxe,
Anthracite metallic

Ordering size

Overall frame dimension (RAM)

From 855	×	1800
Up to 1200	×	2100
Up to 1330	×	2558

Surface finish Planar **

In 7 colours Matt deluxe

1326

1370


** For side doors with Planar surface finish, the door leaf frame and wall frame are coated in a colour matching the colour Matt deluxe, but with a higher gloss level than Matt deluxe.


Sectional garage doors


RenoMatic


Optional extras

Optional extras for sectional garage door RenoMatic

Track application N		£
	Door version with track application N and torsion spring assembly	Complete price for door with track application Z + surcharge 112

Track application L		£
	Door version with track application L and torsion spring at the back	Complete price for door with track application N + surcharge 174


Break-in-resistant fittings RC 2 prepared at the factory (only for sectional doors RenoMatic with garage door operator)		£
	Track application Z/N/L	Set 1: Grid height ≤ 2250 mm up to 4 door sections Per set 261
		Set 2: Grid height > 2250 mm up to 6 door sections Per set 299

Frame covering in the colour of the door		£
<ul style="list-style-type: none"> Made of galvanized sheet steel Calculation = door height (RM) Calculation for track application BZ or BL with flush-fitting panel = overall frame dimension (RAM) 		

1 pair of angle sections		55 x 19.5 mm	90 x 19.5 mm
Surface finish Woodgrain	RAL 9016 Traffic white	Per m as calculated	44
	RAL 9005 Jet black	Per m as calculated	51
	RAL 9006 White aluminium		61
	RAL 9007 Grey aluminium		76
	RAL 7016 Anthracite grey		
	RAL 8028 Terra brown		
	CH 703 Anthracite metallic		
Slategrain surface finish (Smooth surface)	RAL 9016 Traffic white	Per m as calculated	47
	RAL 9005 Jet black	Per m as calculated	62
	RAL 9006 White aluminium		79
	RAL 9007 Grey aluminium		
	RAL 7016 Anthracite grey		
	RAL 8028 Terra brown		
	CH 703 Anthracite metallic		
Surface finish Planar	CH 9016 Matt deluxe, Traffic white	Per m as calculated	47
	CH 905 Matt deluxe black	Per m as calculated	62
	CH 9006 Matt deluxe, White aluminium		79
	CH 9007 Matt deluxe, Grey aluminium		
	CH 7016 Matt deluxe, Anthracite grey		
	CH 8028 Matt deluxe, Terra brown		
	CH 703 Matt deluxe, Anthracite metallic		

Notices:

The colours of the frame covering must match the door leaf colour.

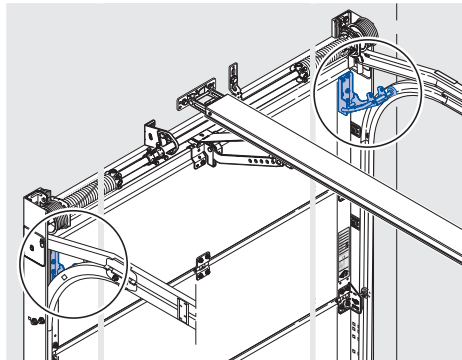

Door ventilation set (folding roller bracket)		Article no.	£
	<ul style="list-style-type: none"> Only possible with operators ProMatic series 3 / 4 and SupraMatic series 2 / 3 / 4 Can be combined with interior and exterior sensors, see climatic sensors on page 9 Not possible for track application H, track application BZ, track application BL and doors with wicket door From LZ > 3000 mm, leading photocell VL 1 is required (contained in set 2) 		
	Set 1 (LZ ≤ 3000 mm)	4015282	Per set 150
	Set 2 (LZ > 3000 mm) with VL 1	4015284	Per set 668
Notice:			
<ul style="list-style-type: none"> Increased space requirement (see technical manual). Not possible with fitting bracket, article no. 436099. Set 2 not possible for chamfered height adjustment. Not possible for version in RC 2! 			
Calculation of the ventilation cross-section see technical manual			
LZ	Clear frame dimensions (ordering size) = clear passage width		

Sectional garage doors

RenoMatic

Optional extras

Optional extras for sectional garage door RenoMatic


Climate sensors		Article no.	£	
Internal climate sensor HSKI-1	<ul style="list-style-type: none">• Wired internal sensor to detect air humidity inside the garage• Integrated internal push button (Open, Close, light, ventilation, partial opening)• LCD display• The device has two system jacks<ul style="list-style-type: none">- Bushing 1 for connecting the receiver to the operator- Bushing 2 for connecting the extendable external sensor HKSA and / or option relay HOR 1 fan• With 7 m system cable, 6-wire, white• Protection category: for dry rooms only• Temperature range: -20°C to +60°C• Colour: Pure white RAL 9010• Dimensions (W × H × D): 80 × 80 × 35 mm <p>Only suitable for SupraMatic and ProMatic series 4 operators.</p>	4510232	Each	166
				
HKSA external climate sensor	<ul style="list-style-type: none">• Extendable external sensor for climate sensor HSKI• With 7 m system cable, 6-wire, white• Protection category: IP X4• Temperature range: -20°C to +60°C• Colour: Pure white RAL 9010• Dimensions (W × H × D): 80 × 80 × 35 mm	4511670	Each	116
				

Sectional garage doors

RenoMatic

Optional extras



Optional extras for sectional garage door RenoMatic

Ventilation			£
	Ventilation slots in the bottom seal Ventilation cross-section 65 cm ² /m width	Per m	41

Wind threshold		Article no.	£
	Set consisting of wind threshold (material EPDM), adhesive and fixing material	Set 1: LZ ≤ 3000 mm	4015951 Per set 150
		Set 2: LZ > 3000 mm	4015952 Per set 212


Shortening set (for RenoMatic)		Article no.	£
Cannot be ordered separately!	For shortening the door width (on site) LZ ≤ 2500 mm, width shortening max. 125 mm, LZ ≥ 2501 mm, width shortening max. 250 mm	3053173	Per set 50
	For shortening the door height from the top (on site) Height shortening min. 40 mm * to max. 124 mm		Per m 93

Shortening by min. 40 mm is required to position the shortening profile on the section.


Fittings		Article no.	£
The below listed door handle sets are supplied with: Lock with profile half cylinder with side locking Template for lock knock-out on site A factory lock knock-out will result in a longer delivery time and must be explicitly ordered (State position on order!).			
	Door handle set, black plastic, prepared for profile cylinder	4015100	Each 85
	Door handle set, cast aluminium RAL 9016, prepared for profile cylinder	3060831	Each 235
	Door handle set, brown cast aluminium, prepared for profile cylinder	3076054	Each 235
	Door handle set, brushed stainless steel, prepared for profile cylinder	3060835	Each 235
	Set: inside locking for track application Z, N and L on right	3061874	Each 75
	Set: inside locking for track application Z, N and L on left	3061875	Each 75

Set of special anchors 1 (See the technical manual)		Article no.	£
8 × special anchors for side frame fitting up to LZ = 5500 mm		3056482	Per set 75


Reinforces the complete frame construction in difficult fitting situations



Unevenness can be accommodated without having to use packing or subframe




Fitting in the opening without additional posts



Fitting behind brickwork risk-free

(Frame covering must also be ordered)

Support bracket		Article no.	£
	Support bracket 120 × 70 × 60 mm	4015628	Each 36
	Support bracket 170 × 70 × 60 mm	4015629	Each 41
LF	Structural opening		
LZ	Clear frame dimensions (ordering size) = clear passage width		
WDVS	Thermal insulation composite system		

Sectional garage doors

RenoMatic

Optional extras

Optional extras for sectional garage door RenoMatic

Door leaf reinforcement			£
Door leaf reinforcement set for RenoMatic Only with door version with torsion spring assembly (technical inspection required)	Each		668

Notice on door leaf reinforcement:

Sun exposure may result in deflection of the door elements and foam break. To reduce the possibility of section deflection caused by sun exposure, all doors from LZ > 4500 mm are equipped at the factory with the door leaf reinforcement set.

- RAL colours / Matt deluxe colours
RAL 7016 Anthracite grey / CH 7016 Matt deluxe, Anthracite grey
RAL 8028 Terra brown / CH 8028 matt deluxe, Terra brown
RAL 9005 Jet black / CH 905 Matt deluxe black
- Colours
CH 703 Anthracite metallic / CH 703 Matt deluxe, Anthracite metallic


Colours that have not been listed can be optionally ordered with the door leaf reinforcement set.

In case of any doubt, we recommend ordering door leaf reinforcement optionally for doors under thermal load not equipped with door leaf reinforcement at the factory.


Door leaf reinforcement limits section deflection, but does not prevent it completely.

Use of a SupraMatic is recommended for doors with operator and door leaf reinforcements.

ThermoFrame – Frame support with thermal break



Set 4 and 5 consisting of:
Plastic angle profiles (3 units) with lip seal, black 84 × 22.5 mm



Frame support set consisting of:
Plastic profiles without lip seal, black 65 × 20.5 mm

Notice on sets 4 and 5 (frame covering not possible):

A single-skinned fascia panel is fitted.
Required headroom corresponds with track application Z, N and L.
Please also note the supplements and limitations in the technical manual!

Notice regarding frame support:

A single-skinned fascia panel is fitted.
Required headroom corresponds with track application Z, N and L.
55 mm frame covering is possible.
Not possible in combination with "retrofit fascia fixing"!

ThermoFrame set 4 Article no. 4015121	RM height ≤ 3000 mm LZ width ≤ 3210 mm	3 plastic angle profiles	Length 3210 mm	Each	434
ThermoFrame set 5 Article no. 4015122	RM height ≤ 3000 mm LZ width ≥ 3210 mm and ≤ 6000 mm	2 plastic angle profiles 1 plastic angle profile	Length 3210 mm Length 6000 mm	Each	434
Frame support set Article no. 4018338	LZ width ≤ 3500 mm	3 plastic angle profiles	Length 3520 mm	Each	232
Frame support set Article no. 4018339	LZ width > 3500 mm	4 plastic angle profiles	Length 3520 mm	Each	274

Cleaning and maintenance set



Contents 1 × cleaner,
1 × cleaning sponge,
1 × 2-in-1 polish,
1 × polishing sponge,
2 × microfibre cloth,
1 × oil

Article no.

4020356

Per each

£



72

Sectional garage doors

RenoMatic

Optional extras

Optional extras for sectional garage door RenoMatic

Steel single-skinned panels			£	
	Single-skinned steel fascia 95 mm (for optional orders) The single-skinned steel fascia 95 mm is included in the door assembly and does not have to be ordered separately. Made of hot-galvanized sheet steel			
	As a fascia panel up to 100 mm high			
	Surface finish Woodgrain	RAL 9016 Traffic white	Per m	43
	Slategrain surface finish (Smooth surface)	RAL 9016 Traffic white	Per m	48
	Surface finish Planar	CH 9016 Matt deluxe, Traffic white	Per m	48
	Single-skinned steel fascia 125 mm Made of hot-galvanized sheet steel			
	As a fascia panel up to 125 mm high			
	Surface finish Woodgrain	RAL 9016 Traffic white	Per m	47
	Slategrain surface finish (Smooth surface)	RAL 9016 Traffic white	Per m	62
	Surface finish Planar	CH 9016 Matt deluxe, Traffic white	Per m	62
Polyester-primer coating Surcharge for version in Traffic white	For single-skinned panels Woodgrain / Slategrain	RAL 9006 White aluminium, RAL 9007 Grey aluminium, RAL 7016 Anthracite grey, RAL 8028 Terra brown, CH 703 Anthracite metallic	Per m ²	57
	For single-skinned panels Planar	CH 9006 Matt deluxe, White aluminium, CH 9007 Matt deluxe, Grey aluminium, CH 7016 Matt deluxe, Anthracite grey, CH 8028 Matt deluxe, Terra brown, CH 703 Matt deluxe, Anthracite metallic	Per m ²	57

Notice:




The colours of the single-skinned panels must match the door leaf colour.

Sectional garage doors

RenoMatic

Optional extras

Optional extras for sectional garage door RenoMatic

Steel double-skinned panels									£	
<p>* Notice on door section height: The following table contains the grid heights and the corresponding section heights (door section heights) of the door. To ensure that the view of the panels (e.g. regarding the rib spacing) matches the door, the panels are made in multiple parts for adjustment heights that exceed the door section height.</p>										
Grid height (mm)	2000	2080	2125	2250	2375	2500	2810	3000		
No. of sections	4	4	4	4	5	5	5	6		
Section height (mm) (Door section height)	500	531	531	562	475	500	562	500		
RC 2 not possible!										
 <p>Woodgrain</p>	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed, enclosed with end caps on 3 sides Exterior Woodgrain-embossed / interior Stucco-textured</p>									
	<p>As a fascia panel from 61 mm up to the door section height *</p>								Per m	128
	<p>M-ribbed, based on RAL 9016</p>									
 <p>Slategrain</p>	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed, enclosed with end caps on 3 sides Exterior Slategrain / interior Stucco-textured</p>									
	<p>As a fascia panel from 61 mm up to the door section height *</p>								Per m	128
	<p>L-ribbed, based on RAL 9016</p>									
 <p>Planar</p>	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed, enclosed with end caps on 3 sides Exterior Planar / interior Stucco-textured</p>									
	<p>As a fascia panel from 61 mm up to the door section height *</p>								Per m	166
	<p>L-ribbed, CH 9016 Matt deluxe, Traffic white</p>									
<p>Polyester-primer coating</p> <p>Surcharge for version in Traffic white</p>	For double-skinned panels Woodgrain / Slategrain		<p>RAL 9005 Jet black RAL 9006 White aluminium RAL 9007 Grey aluminium RAL 7016 Anthracite grey RAL 8028 Terra brown CH 703 Anthracite metallic</p>					Per m ²	57	
	For double-skinned panels Planar		<p>CH 905 Matt deluxe black CH 9006 Matt deluxe, White aluminium CH 9007 Matt deluxe, Grey aluminium CH 7016 Matt deluxe, Anthracite grey CH 8028 Matt deluxe, Terra brown CH 703 Matt deluxe, Anthracite metallic</p>					Per m ²	57	




Notice: The colours of the double-skinned panels are only available matching the door leaf colour.

Sectional garage doors


RenoMatic

Optional extras

Optional extras for sectional garage door RenoMatic

Fixing variants for double-skinned panels		Surcharge	£
	Variant 1 with lintel (cover anchor)	No surcharge	
	Variant 2 without lintel (bracket)	No surcharge	
	Variant 3 with and without lintel (cover anchor and bracket)	Per set	47

Flush-fitting steel panels (up to LZ = 5500 mm) £

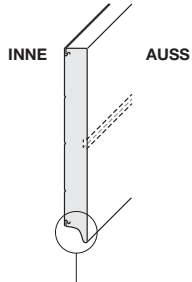

INNE Interior
AUSS Exterior

Connection area of top door section to the flush-fitting panel

When the door is closed, the top door section is flush-fitting with the panel.




Please note the supplements and limitations in the technical manual!
 Only one part!
 Shortened top door section not possible!
 Aluminium frame top door section not possible!
 RC 2 not possible!

* Notice on door section height:
 The following table contains the grid heights and the corresponding section heights (door section heights) of the door.

Panel height BH = RAM – RM – 39 mm

Grid height (mm)	2000	2125	2250	2375	2500	2810	3000
No. of sections	4	4	4	5	5	5	6
Section height (mm) (Door section height)	500	531	562	475	500	562	500

Track applications BZ and BL for flush-fitting panels see page 15.

 Woodgrain	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed Exterior Woodgrain-embossed / interior Stucco-textured</p> <p>As a fascia panel from a min. of 190 mm (BH min. 150 mm) up to door section height – 19 mm * of the door</p> <p>M-ribbed, based on RAL 9016</p>	Per m	253
 Slategrain	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed Exterior Slategrain / interior Stucco-textured</p> <p>As a fascia panel from a min. of 190 mm (BH min. 150 mm) up to door section height – 19 mm * of the door</p> <p>L-ribbed, based on RAL 9016</p>	Per m	253
 Planar	<p>Double-skinned fascia panel Made of hot-galvanized sheet steel, PU-foamed Exterior Planar / interior Stucco-textured</p> <p>As a fascia panel from a min. of 190 mm (BH min. 150 mm) up to door section height – 19 mm * of the door</p> <p>L-ribbed, CH 9016 Matt deluxe, Traffic white</p>	Per m	321

Notice: The colours of the flush-fitting panels are only available matching the door leaf colour.

Sectional garage doors


RenoMatic


Optional extras

Optional extras for sectional garage door RenoMatic

Flush-fitting steel panels (up to LZ = 5500 mm)				£
Polyester-primer coating	For flush-fitting panels Woodgrain / Slategrain	RAL 9005 Jet black RAL 9006 White aluminium RAL 9007 Grey aluminium RAL 7016 Anthracite grey RAL 8028 Terra brown CH 703 Anthracite metallic	Per m ²	57
	Surcharge for version in Traffic white			
	For flush-fitting panels Planar	CH 905 Matt deluxe black CH 9006 Matt deluxe, White aluminium CH 9007 Matt deluxe, Grey aluminium CH 7016 Matt deluxe, Anthracite grey CH 8028 Matt deluxe, Terra brown CH 703 Matt deluxe, Anthracite metallic	Per m ²	57

Notice: The colours of the flush-fitting panels are only available matching the door leaf colour.

Track application BZ – track application Z for flush-fitting panel (delivery times as for special sizes)		Surcharge	£
	Track application for doors with tension spring technology with lateral double tension springs on the inside, with 2 cables on each side in combination with a flush-fitting panel, frame made of galvanized sheet steel with polyester-primer coating. Frame covering in the colour of the door available at a surcharge. ► Please also note the technical manual! RC 2 not possible!	On track application Z	255

Track application BL – track application L for flush-fitting panel (delivery times as for special sizes)		Surcharge	£
	Track application for doors with torsion spring technology for low lintel with torsion spring assembly at the rear, with cable drums and approved spring safety device as well as lateral cables on the inside and fascia panel in combination with a flush-fitting panel, frame made of galvanized sheet steel with polyester-primer coating. Frame covering in the colour of the door available at a surcharge. ► Please also note the technical manual! RC 2 not possible!	On track application L	255

Retrofit fascias (see technical manual or fitting instructions)


Set: Fascia frame -95- for fitting in the reveal
Set: Fascia frame -125- for fitting in front of the reveal

Set -95- consists of:

- 2 panels, width 95 mm, length 2800 mm each
- 1 panel, width 95 mm, length 3200 mm
- Fixing material
- 2 plastic panel shoes (black)

Set -125- consists of:

- 2 panels, width 125 mm, length 2800 mm each
- 1 panel, width 125 mm, length 3200 mm
- Fixing material
- 2 plastic panel shoes (black)

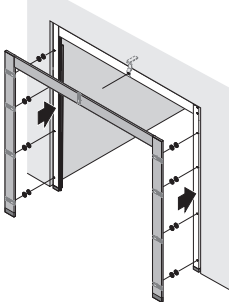		Per set	Set -95-	Set -125-
	Surface Woodgrain-embossed White based on RAL 9016, Traffic white		267	364
	Slategrain surface finish White, based on RAL 9016, Traffic white (smooth surface)	Per set	284	432
	Surface finish Planar CH 9016 Matt deluxe, Traffic white	Per set	284	432

Polyester-primer coating	For retrofit fascias (fascia frame) Woodgrain / Slategrain	RAL 9005 Jet black RAL 9006 White aluminium RAL 9007 Grey aluminium RAL 7016 Anthracite grey RAL 8028 Terra brown CH 703 Anthracite metallic	Per set	57
	Surcharge for version in Traffic white			
	For retrofit fascias (fascia frame) Planar	CH 905 Matt deluxe black CH 9006 Matt deluxe, White aluminium CH 9007 Matt deluxe, Grey aluminium CH 7016 Matt deluxe, Anthracite grey CH 8028 Matt deluxe, Terra brown CH 703 Matt deluxe, Anthracite metallic	Per set	57

Notice:





The colours of the retrofit fascias are only possible matching the door leaf colour.

Garage door operators

ProMatic and SupraMatic E / P

for sectional garage doors RenoMatic

Garage door operators ProMatic and SupraMatic

Garage door operator		ProMatic series 4	SupraMatic E series 4
			
Operator head	Price in £	356	479
Scope of delivery	Operator head	Housing: plastic, galvanized steel base plate	Housing: aluminium and plastic, galvanized steel base plate
	Hand transmitter	2 × HSE 4 BS black (textured surface) with plastic caps	2 × HSE 4 BS black (textured surface) with chrome caps
			
Warranty period		5 years	5 years
Number per pallet		48	48
To be completed by the regional sales office warehouse		Boom FS10	Boom FS10
Max. door size	Width	5000 mm	5500 mm
Max. door leaf surface		11.25 m ²	13.75 m ²
Operator data	Operating voltage	230 / 240 V AC	230 / 240 V AC
	Standby	< 1 W	< 1 W
	Operator voltage	24 V	24 V
	Peak force	750 N	800 N
	Door travel speed	max. 20 cm/s	max. 25 cm/s
	Operator light	10 LEDs	20 LEDs
	Protection category	Only for dry rooms	Only for dry rooms
	Temperature range	-20°C to +60°C	-20°C to +60°C
	Radio frequency	868 MHz BiSecur	868 MHz BiSecur
Connection options / functions		<ul style="list-style-type: none"> • Transmitter 868 MHz with BiSecur radio technology • Button / impulse • 2-wire photocell 	


Booms FS 10 (1-part)	Article no.	£	Overall length	Travel distance	Sectional door depth 42 mm		
					Track application N Max. height	Track application L / Z Max. height	
K – short boom	FS 10-K	435210	168	3200 mm	2475 mm	2250 mm	2125 mm
M – medium boom	FS 10-M	435211	203	3450 mm	2725 mm	2500 mm	2375 mm





Brand quality for residential and commercial construction

The family-owned company Hörmann offers all important construction components for building and renovating projects from a single source. We manufacture in highly-specialised factories using state-of-the-art production technologies. Furthermore, our employees work intensively on new products, continual further developments and improvements to details. The results are patents and one-of-a-kind products you can depend on.

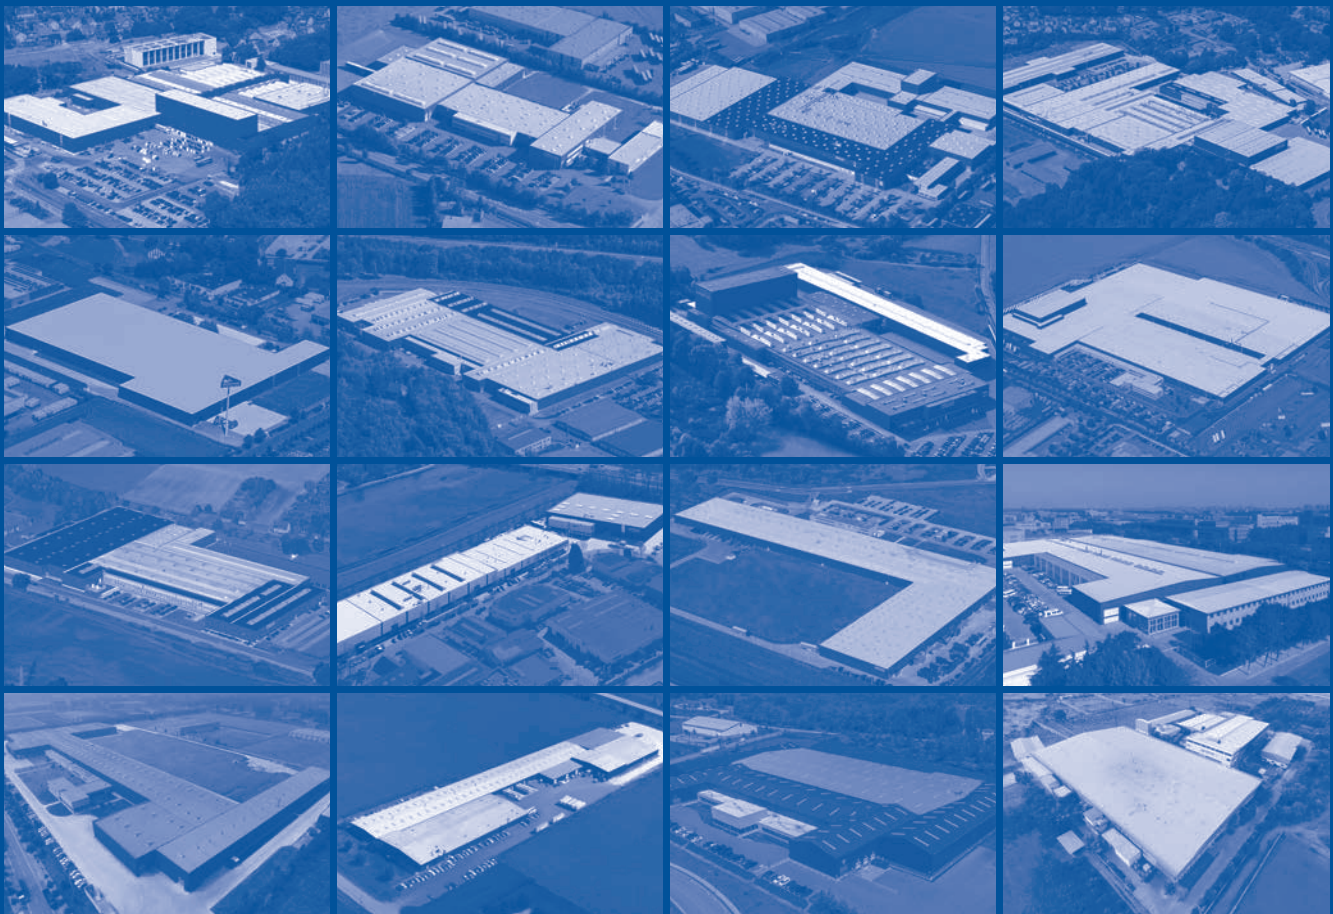

Issue 01 06.2024

www.hormann.co.uk

Hörmann (UK) Ltd
Gee Road
Coalville
Leicestershire
LE67 4JW

Tel: 01530 513000
Fax: 01530 513001

www.hormann.co.uk

HÖRMANN